

GUTTERBUDDY™

CURB INLET DRAIN FILTER

PREVENTS SEDIMENT, DEBRIS AND OTHER POLLUTANTS FROM ENTERING STORMWATER SYSTEMS

GutterBuddy™ is designed for curb inlets without grates where water flow is critical. The filtering action lets water freely flow through the fibrous material while stopping sediment and debris. Built-in overflows drain water even more quickly during extreme events.

Long lasting GutterBuddy Curb Inlet Filters are flexible enough to conform to any curb radius, allowing for quick and easy installation. These inlet filters are 9" in diameter and can be purchased in multiple lengths to fit any project.

AVAILABLE UNITS

- 4'
- 6'
- 8'
- 10'
- 12'
- 14'
- 16'


ADVANTAGES

- Lightweight and easy to install and maintain
- Easy to maintain and reusable
- Available in 4'–16' lengths (Should be 2' longer than curb opening)
- Keeps out sand, asphalt millings and other fine sediment
- Washable and reusable

SPECIFICATIONS

PROPERTY	VALUE
Mesh Material Type	5 mil HDPW Photodegradable
Mesh Opening Size	3/8"
Functional Longevity*	9 months - 3 years
Tensile Strength	26 psi
UV Stability (ASTM G-155)	23% at 1,000 hrs
Fill Material	100% Recycled synthetic carpet fibers
Sediment Filtering Efficiency (ASTM D5141)	95.60%
Flow Rate (ASTM D5141)	11 gpm/ft ²

* FUNCTIONAL LONGEVITY IS AN ESTIMATE ONLY. SITE SPECIFIC CONDITIONS MAY SIGNIFICANTLY AFFECT LONGEVITY.

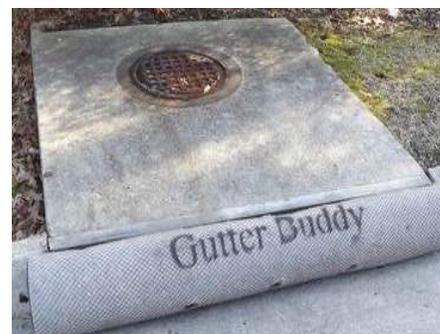

For more information about Inlet Protection, contact Inside Sales at **800.448.3636** or **info@ferguson.com** or visit us at **fergusongss.com**